

QUOTATION FORM

Obion County Board of Education

PASSENGER 78-passenger

BUS TYPE 2013 Conventional

School Bus Bid Proposal Sheet

BUS MANUFACTURER Blue Bird

CHASSIS MANUFACTURER Blue Bird

ENGINE MODEL AND HORSEPOWER Cummins in-line 6 ~ 240 HP

Purchase Price per bus as specified in attached specifications \$86,436.00

Total for 2 buses \$172,872.00

Digital Camera System REI with Hard Drive and 2 Cameras

All units meet or exceed State and Federal Regulations

=====

Name of Bidder: Central States Bus Sales, Inc.

Address: 303 Business Park Drive Lebanon Tn 37090

Authorized Representative Paula Garner Date: 05/23/12

800 Phone Number: 1-800-825-8273

Federal 43-1051799



Central States Bus has made the following deviations:

Cummins Engine is in-line 6 is not a wet sleeve

Engine Block heater is 750 watt is not 1250 watt

Torque rating is 520 is not 560

Alternator is Leece Neville 240 AMP

Front Axle is 12,000 lb is not 10,000 lb

Rear Axle is 23,000 lb air ride suspension is not 21,000 lb

Front Brakes are 5" is not 6"

Wheels are hub piloted are not stud piloted

Wheelbase is 280' is not 276'


Headroom is 77" is not 78"

No magnet latch for crossing arm

2100 CCA Group 31 Batteries (3 at 700 CCA each)


Gray rubber flooring is not vinyl


Body Plan: 5007264

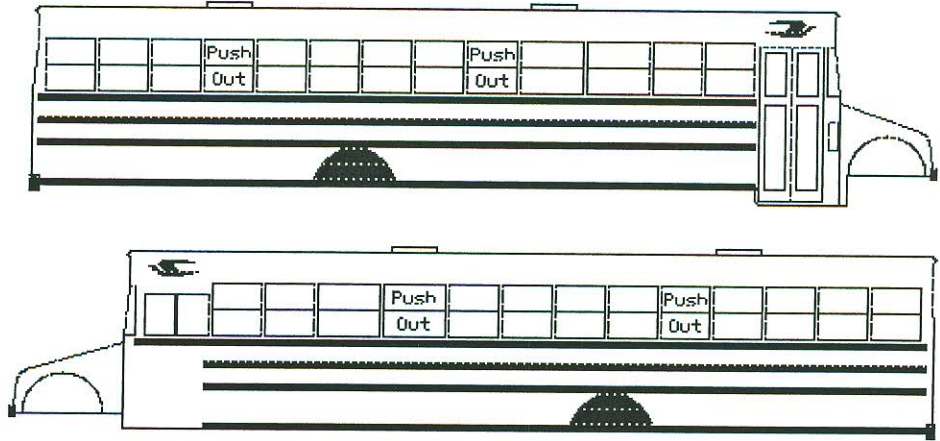

Seat Plan: 9821

SP: 9821 BBCV 3507, 78 CAP

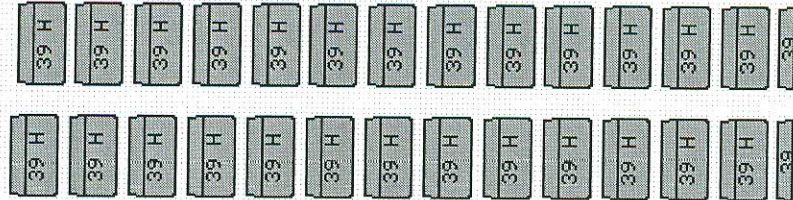

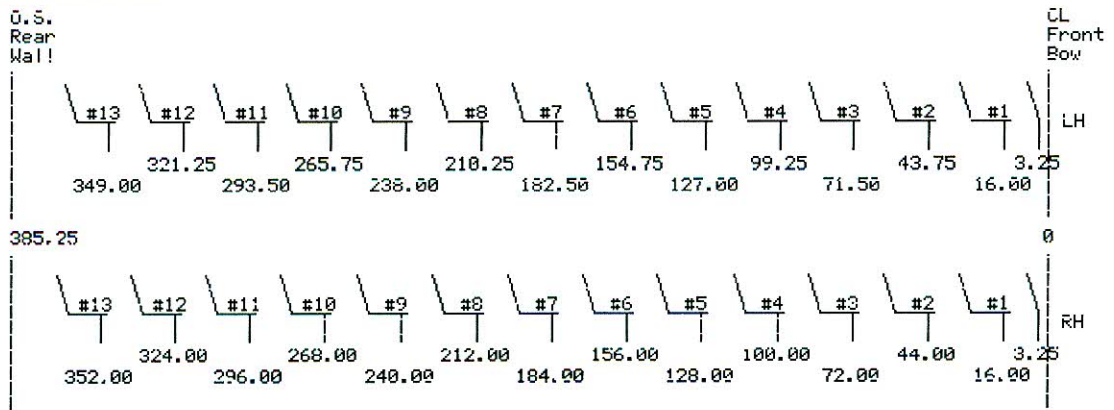

Row	RH Seats	LH Seats
1	39SBHB	39SBHB
2	39SBHB	39SBHB
3	39SBHB	39SBHB
4	39SBHB	39SBHB
5	39SBHB	39SBHB
6	39SBHB	39SBHB
7	39SBHB	39SBHB
8	39SBHB	39SBHB
9	39SBHB	39SBHB
10	39SBHB	39SBHB
11	39SBHB	39SBHB
12	39SBHB	39SBHB
13	39SBHB	39SBHB

Dimensions are to center line of front mounting hole.

LH Seat Spacing: 27.75
 LH Knee Clearance: 25.25

RH Seat Spacing: 28.00
 RH Knee Clearance: 25.50

BBCV3507 SBHB

DO NOT SCALE

BBCV 3507

Capacity	78
Seat Plan #	9821
Wheelbase	280.0

**OBION COUNTY SCHOOL SYSTEM 78 PASSENGER CONVENTIONAL
COMPLETE SCHOOL BUS SPECIFICATIONS**

Vehicle is to meet or exceed all Department of Transportation Federal Motor
Vehicle Safety Standards & State of TN Specifications For School Buses

ENGINE	*	240 + hp In-line 6 Cylinder wet sleeve engine with 560 ft lbs torque minimum. Minimum 1,250 watt engine heater installed. Complete engine noise package. Warranty 5 years unlimited miles.
ENGINE	*	Alternate 240+ hp 8 cylinder engine with 560 ft. lbs. torque minimum. Minimum 1,250 watt engine heater installed. Complete engine noise package. Warranty 5 years unlimited miles.
ENGINE		All engines must be at least 2010 emissions compliant.
HOOD		Tilting hood and must be three (3) piece hood.
GAUGES		Water & oil w/ warning light with buzzer. AMP meter and voltmeter. Speedometer, tachometer, dual air pressure gauges
CRUISE CONTROL AND HIGH IDLE		Dash mounted
TRANSMISSION		Minimum of 2500 series, 5 speed automatic with external oil filter. External cooler mounted in front of radiators.
ALTERNATOR	*	200 AMPS
AIR COMPRESSOR		13.2 CFM
FRONT WHEEL BEARINGS		Oil bath.
FRONT AXLE	*	10,000 lb. minimum
REAR AXLE	*	21,000 lb air ride suspension
FRAME		50,000 lbs. PSI
DIFFERENTIAL RATIO		To attain 70 mph.

RUBBER FENDERS	rear
	Front 16.5X6, Rear 16.5X7 thick Q-plus shoes. Air brake system to include air dryer AD-9 with heater and air tank drain valve DV-2 with heater. Non-asbestos brake lining, 1 automatic slack adjuster at each wheel. Must include 4 channel-anti lock brake system.
BRAKES	*
WHEEL BASE	* 276" & Must not exceed state allowed limits.
WHEELS	* Disc type/10 stud, 22.5X8.25. Include spare rim only.
TIRES	11R22.5, 16 ply.
PASSENGER/REAR WINDOWS	To be 24X12 with black andonized frame. 28% dark tint.
ROOF	* 78" minimum head room.
ENTRANCE DOOR	Electric outward opening 36" wide with key electric locking and 3 position switch on dash.
ENTRANCE DOOR STEPS	Should be koreséal pebble tread with white pebble top nosing.
WINDSHIELD WIPERS	Two (2) electric operated heavy-duty wipers. Washer to be three (3) qt. capacity minimum. Intermittent wipers.
	Three (3) point driver seat belt with D loop. Adjustable air, including right side arm rest & cloth insert. Seat is to be all gray color.
DRIVER'S SEAT	
PASSENGER SEATS	Seat belt ready. Gray color.
MASTER DISCONNECT	For all body circuits.
NOISE PACKAGE	To include full length perforated ceiling.
GRAB RAILS	Two (2) shall be supplied with 1 aft & 1 forward of service door.
REFLECTIVE PACKAGE	Complete reflective tape package to be included
BUMPERS	To meet Federal & State Specifications.
BODILY FLUID/FIRST AID KITS	To meet Federal & State Specifications.
MUD FLAPS	Front & rear.

(2) STOP SIGNS FRONT & REAR*	Electric operated w/strobe lights. Also include electric crossing gate & magnet latch on front bumper with interrupt switch.
REAR EMERGENCY DOOR	Upper & lower glass with guard on lower half of door. Include door lock with starter interrupt to prevent starting with door locked.
BODY UNDERCOATING	Underneath entire body is to be undercoated.
RADIO	AM/FM CD player with PA system inside & outside. Include 6 speakers.
VIDEO CAMERA	REI digital with hard drive & two (2) eyes.
CHILD REMINDER SYSTEM	Warning buzzer interior (not in side panel) to be installed on bus.
ROOF EXITS	Specialty MFG Pro-low Series 9245. Total of (2) roof hatches.
EXIT WINDOWS	Four (4) push out emergency exit windows, tow (2) on each side with warning buzzer. 24"X12" windows with black adonized frame.
SHOCKS	Front & rear.
STEERING	Hydraulic power, tilt column.
FUEL TANK	Equipped with 100 gl minimum, & sending unit. Access to the fuel tank shall be on the right side mounted between frame rails & behind rear axle.
INSPECTION PLATE	In floor for access to the fuel tank sending unit.
DRIVE SHAFT	Metal guards required.
BATTERY	* Three (3) 1950 CCA minimum all three combined.
BATTERY COMPARTMENT	Batteries are to be installed in a compartment with easy access from outside of body.
HORN	Dual electric
BACK UP ALARM	Installed behind rear axle with 112 decibels. To meet Federal & State specifications.
EXHAUST	Shall exit left side just in front of duals or through rear bumper.

	Three (3) required. One in the rear not less than 84,500 BTU, one in step well areas of not less than 90,000 BTU with defrosting for the windshield & driver's window & one heater midship not less than 50,000 BTU. Two (2) 6" defroster fans to be supplied. Ball type shut off valves to be installed.
HEATERS/DEFROSTERS	
LIGHTS	Armored type cluster & clearance lights all mounted below roofline.
HEADLIGHTS	Wig-wag alternating.
TOW HOOKS	Two (2) front frame mounted & two (2) rear mounted to Tennessee Specifications.
	All wiring to be properly insulated & each circuit equipped with individual circuit breaker. Breaker panel to be readily accessible to driver. Body wiring to be color-coded & numbered. Body switch panel to be illuminated & easy to reach from driver's seat.
ELECTRICAL	
SOLENOID	Disconnect all body circuits.
DECALS	All decals to be 3M reflective tape, bus sign on front, rear & sides.
8-LIGHT WARNING SYSTEM	Equipped with child reminder system.
	A non-glare interior adjustable rear view mirror 10"X30" minimum size, placed to afford view of the road as well as passengers. Two (2) rear view mirrors located on each side of bus. Mirror on front & one on each side. Heated Mirrors.
MIRRORS	
BODY FLOOR	* Floor covering to be gray vinyl koreseal brand.
WINDSHIELD	Standard with dark shaded top.
ROOF STROBE LIGHT	Located on rear 1/3 of roof. Power pack to be in base of light's metal base. Strobe light guard to be installed.
RUB RAIL	Four (4) on each side, all to be painted black.
COLOR	School Bus chrome yellow with black trim and lettering. The roof is to be white on all buses.

LETTERING/NUMBERING	To include "OBION COUNTY SCHOOLS" on each side. Number on each side to be the same size as letters. Numbers to be on front and rear of bus. Unit numbers will be 1385 & 1386. Windows will be numbered with odd numbers on left side & even numbers on right side on inside of bus.
TOWING	48 months free towing will be included on new buses.
FREIGHT	Please quote as a separate item (FREIGHT FOB TROY, TN)
SERVICE MANUAL	A complete chassis shop service & body parts. CD will be provided.
SERVICE MANUAL	Lubrications, motor oil, transmission & gear box fluid levels, cooling system protected to -20 degrees F.
DIAGNOSTIC SOFTWARE	To be included with each unit.

COMPLETE UNITS SHOULD BE DELIVERED TO TROY, TN AT THE
TRANSPORTATION DEPT., 802 C C GURIEN DRIVE, TROY, TN 38260

PLEASE LIST NEAREST SERVICE WARRANTY DEALER LOCATION